


► Our technology. Your success.
Pumps ■ Valves ■ Service




ECOLINE-S Product range

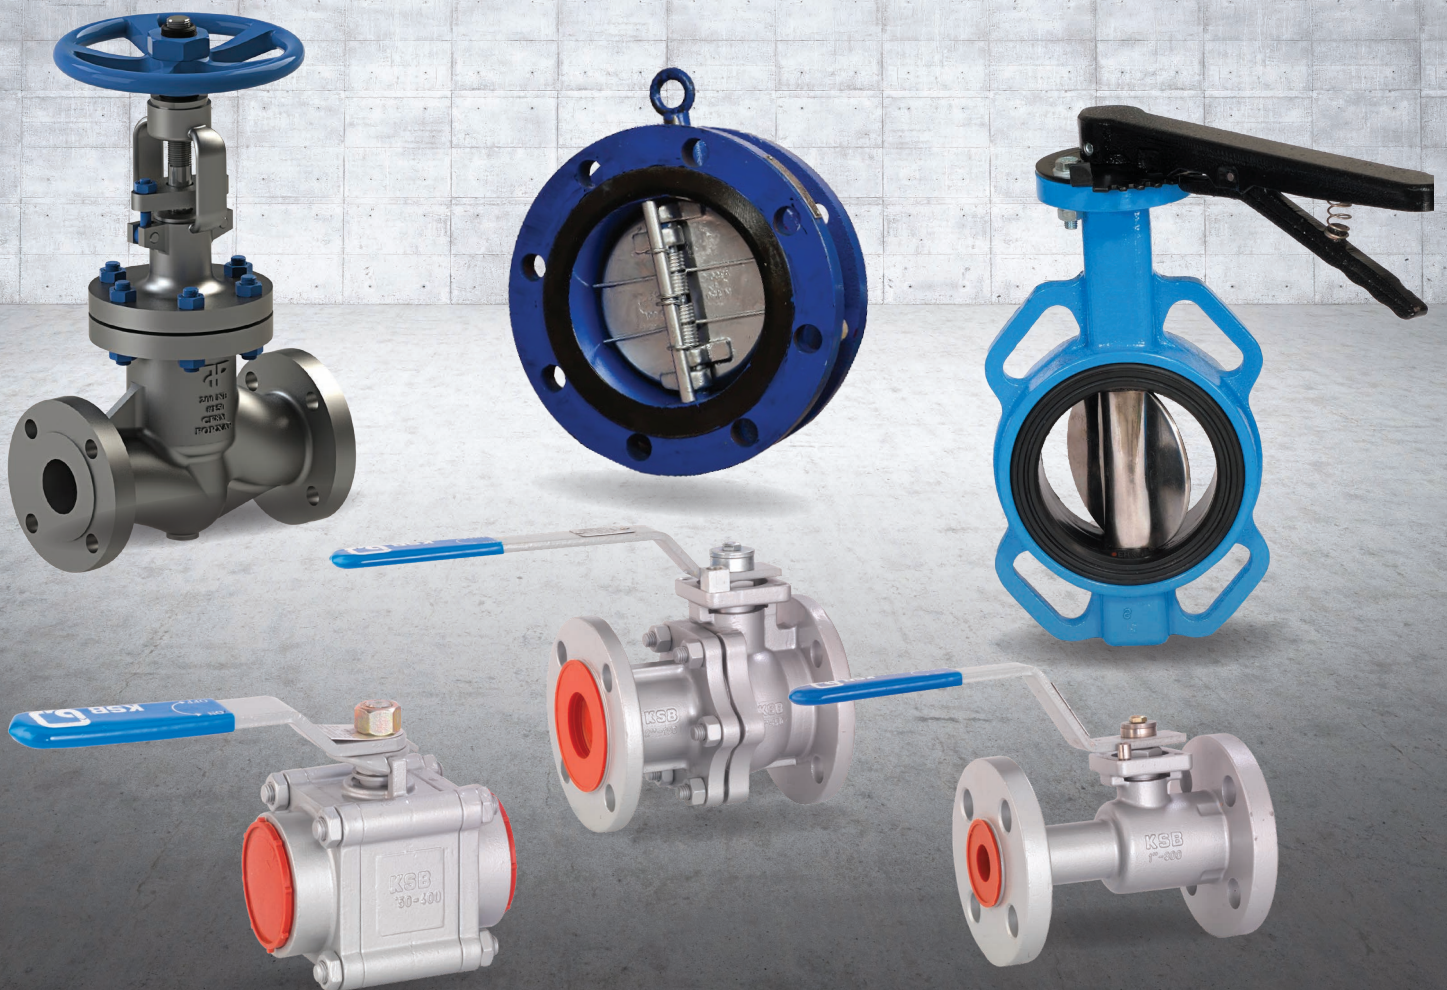

ECOLINE-S

Product Range



ECOLINE BLC-S : Ball Valve

- 3 Piece Design. Size 1/2" To 2"
- Class 400,800 : FB/RB
- Body Material: WCB, CF8, CF8M, A105
- Ball Material: CF8, CF8M
- Seat Material : PTFE (#400), RPTFE (#800)
- Valve Design : EN-ISO-17292
- Application : Process & General Industry, Water, Steam, Gas, Oil, etc.
- PT Ratings : ASME B16.34
- SW End : ASME B16.11



ECOLINE BLN-S : Ball Valve

- Single Piece Design. Size 1/2" To 4"
- Class 150,300 : FB
- Body Material : WCB, CF8, CF8M
- Ball Material : CF8, CF8M
- Seat Material : PTFE
- Valve Design : EN-ISO-17292
- Application : Process & General Industry, Water, Steam, Gas, Oil etc.
- PT Ratings : ASME B16.34
- FL End : ASME B16.25
- Blowout Proof Stem
- Hollow Ball for #150 40mm to 100 mm



ECOLINE BLT-S : Ball Valve


- 2 Piece Design. Size 1/2" to 16"
- Class 150,300 : FB
- Body Material : WCB, CF8, CF8M
- Ball Material : CF8, CF8M
- Seat Material : PTFE
- Valve Design : EN-ISO-17292
- Trunion Mounted for 8" & above
- Application : Process & General Industry, Water, Steam, Gas, Oil, etc.
- PT Ratings : ASME B16.34
- FL End : ASME B16.5

ECOLINE BLD-S : Ball Valve

- 3 Piece Design. Size 1/2" To 6"
- Class 150, 300 : FB/RB
- Body Material : WCB, CF8, CF8M
- Ball Material : CF8, CF8M
- Seat Material : PTFE
- Valve Design : EN-ISO-17292
- Application : Process & General Industry, Water, Steam, Gas, Oil & etc.
- PT Ratings : ASME B16.34
- FL End : ASME B16.5

ECOLINE CDB-S : Butterfly Valve

- Centered Disc
- Size 2" to 12" : PN10
- Size 2" to 24" : PN16
- Body Material : EN-GJL-250
- Disc Material : EN-GJL-400-15
- Stem : ASTM- A276-410, 420
- Seat Material : EPDM, NITRALE
- Valve Design : EN-593
- Application : Water, Fuel, Oil & Gas, Sewage, Irrigation etc.
- PT Ratings : ASME B16.34
- Ends : WAFER
- Ends to Suit : EN-1092, ASME B16.1CL 125, ASME B-16.25 CL 150, BS10



ECOLINE BPCV-S : Dual Plate Check Valve

- Retainerless Design
- Size : 2" to 48"
- Class : 150,300
- Body Material : WCB, CF8, CF8M
- Seat : Metal, Soft
- Trim : 5, 8,10,12,15,16
- Spring : Inconel X750, AISI 316
- Valve Design : API 594
- Application : Oil & Gas, Refineries, LNG, Chemical Storage, Sea Water, Oil Rigs & etc.
- PT Ratings : ASME B16.34
- END : WAFER, FLANGED

ECOLINE BSGT-S/BSGL-S : Bellow Seal Gate/Globe Valve

- Size – 2" to 12" : Class 150/300
- Size – 1/2" to 2" : Class 800
- Body Material : WCB, WCC, CF8, CF8M, F304, F316
- Trim : 5, 8,10,15,16
- Bellow : AISI 316 (I), WITZENMANN
- Bellow Design : MSS-SP-117
- Valve Design : API 600, API602, BS1873
- Application : Nuclear, Thermal Plants, Food & Pharmaceutical Industries, LPG, LNG, Paper & Pulp, etc.
- PT Ratings : ASME B16.34
- End : FL, BW, SW
- Flanges : ASME B16.5



KSB Limited Valves Division

151, Mettupalayam Road, NSN Palayam Post, Coimbatore - 641 031.
Tel.: 0422-2468222, 2468547-9 Email : contactusksbindia@ksb.com
www.ksbindia.co.in

Our toll free no : 1800 233 1299
(Mon - Sun. 8 am to 8 pm)

Mktg. Services / 06-22 /500