



brands you trust.



The Quarter-Turn  
Actuator Experts

**CRANE**

ChemPharma Flow Solutions


[www.cranepharmachem.com](http://www.cranepharmachem.com)

A hand is shown pointing towards the center of the image. The background is a blue-tinted digital interface with various technical diagrams overlaid. On the left, there are concentric circles and a hand icon. In the center, there is a box labeled 'INTEGRITY TESTING UNIT' and the text 'HOLD 1'. On the right, there are more technical diagrams, including a flowchart with nodes labeled 'PI' and 'IPI'.

**LEADING THE WAY IN ACTUATOR DESIGN & MANUFACTURE**

## Revo – World Class Actuator Technology

The Revo brand is the standard for excellence and performance in actuator technology and is widely recognised in the process industries as a leader in quality and innovation. That innovation is partnered with a manufacturing excellence to drive advances in product technology. With our combined knowledge and experience we can offer the optimum actuator for any application.

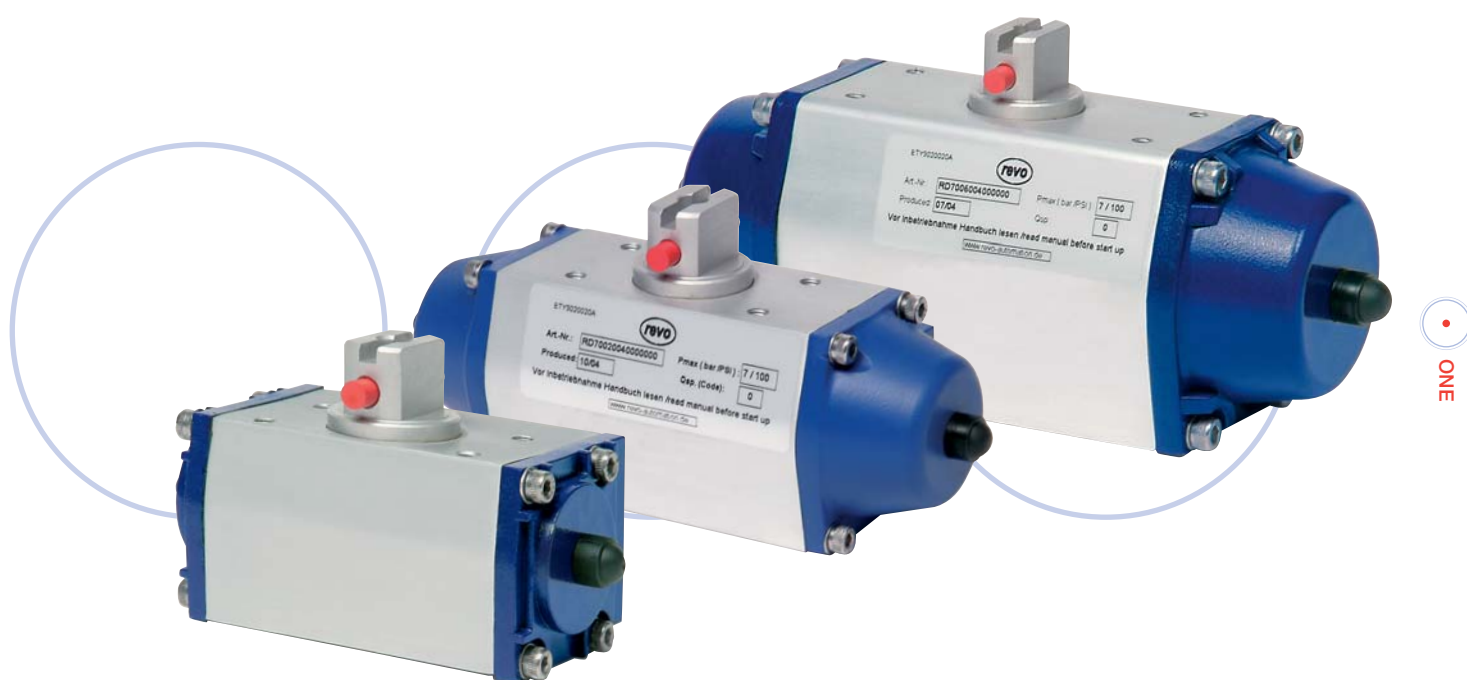

ONE

Revo actuators are primarily used for the operation of valves with 90° travel, such as ball valves, plug valves and butterfly valves, but also find applications where rotary movements of 180°, Multi-position or others are needed. Revo quarter-turn actuators can be used for open/close applications or for control service.


The range comprises standard models to suit a wide range of torque ratings and flange connections. A comprehensive line-up of specific options further extends the application capability to provide a configuration to suit almost every purpose.

On double-acting versions the valve is opened and closed by the supply of compressed air to the actuator. On single-acting actuators compressed air is applied only in one direction, movement in the opposite direction is accomplished by spring force. This offers a fail-safe function in case of a failure in the air supply.

Revo quarter-turn actuators already comply with the EN-standards, which will supersede a large proportion of the DIN-standards, as well as a variety of ISO-standard drafts and various factory standards used in large scale industry.

## A Company with Global Pedigree

As part CRANE ChemPharma Flow Solutions, the Revo brand belongs to a wider group that provides solutions to the diversified process industries through the development, production and distribution of actuators, valves, pumps and related flow components.

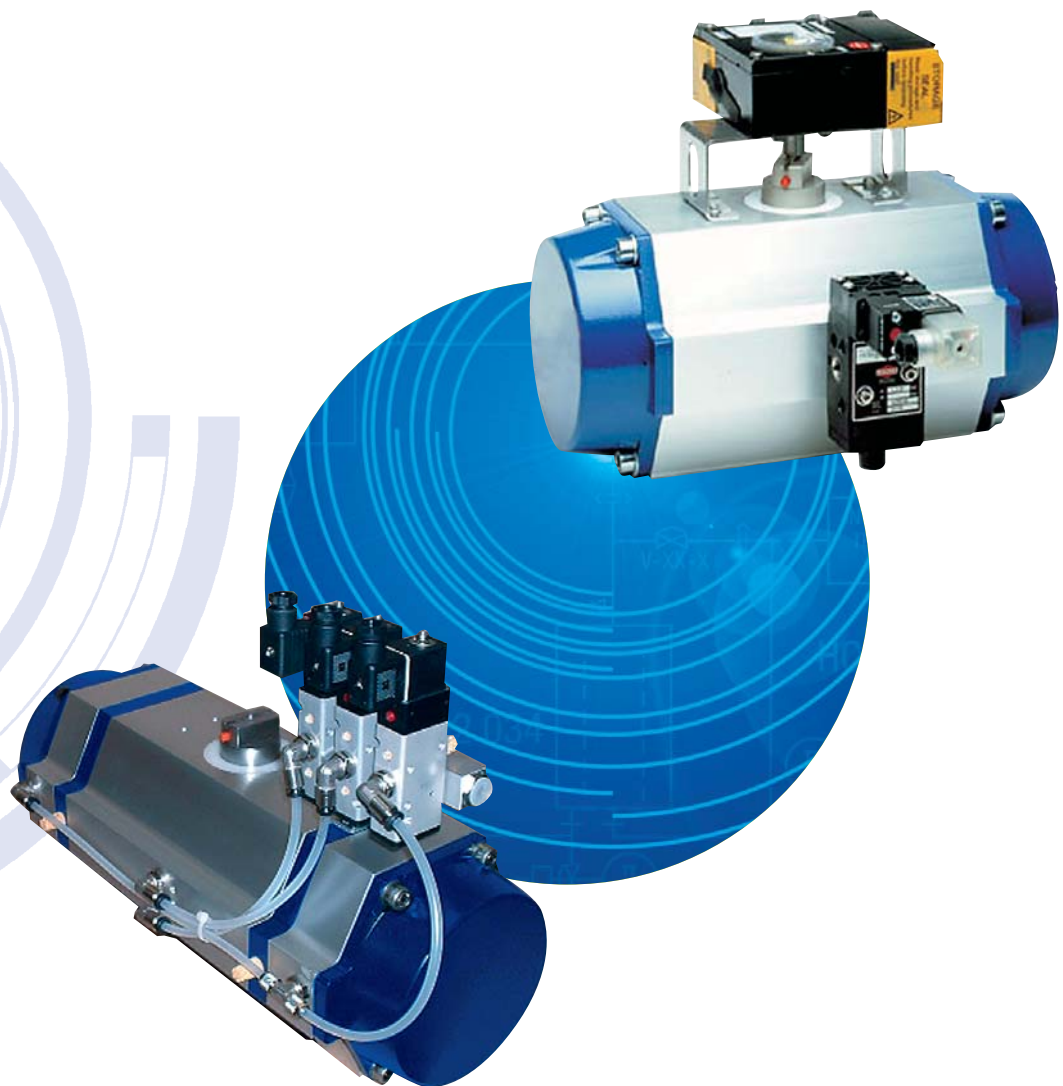

### Experience counts

CRANE ChemPharma Flow Solutions, in turn, draws upon the heritage and manufacturing experience of the Crane Corporation to provide its customers with a worldwide understanding of manufacturing quality standards and legislative requirements.

This, coupled with a long established network of independent distribution partners, ensures a global network that provides the structure to design and deliver world-class products with world class service.



## Automation

Intelligent automation is crucial to the efficiency and profitability of today's processing plants. Whether you're operating basic valve and actuator packages to facilitate simple "open/close" manoeuvres or running complex bus-interfaced systems as part of wider plant control, there's a Revo actuation package to suit the application.



## Customisation is the Key

Nearly every application requires a different solution. Crane can offer the right actuation and control package for your specific demand. That's why at Revo, we offer a full customisation service. We can supply a single, basic actuator or a complete module consisting of actuation and accessories such as solenoids, limit switches, position and bus-system controls.



## Designed for your demand

Revo provides solutions, not just products. Flexibility and fast response from initial design, through assembly, test run and inspection of all component parts enables us to provide finished product that meets your expectations. And you can rest assured in the knowledge that our Quality Assurance procedures fully comply with ISO 9001/EN 29001 operational standards.



# Revo Pneumatic Quarter Turn Actuators

Revo pneumatic quarter-turn actuators provide efficient solutions for plant automation tasks. Our unique design features enable continuous trouble-free operation.



Standard connections allow trouble-free installation of accessories such as solenoids, limit switches and positioning devices.

Blow-out safe bushing. No external circlips or snap rings to corrode.

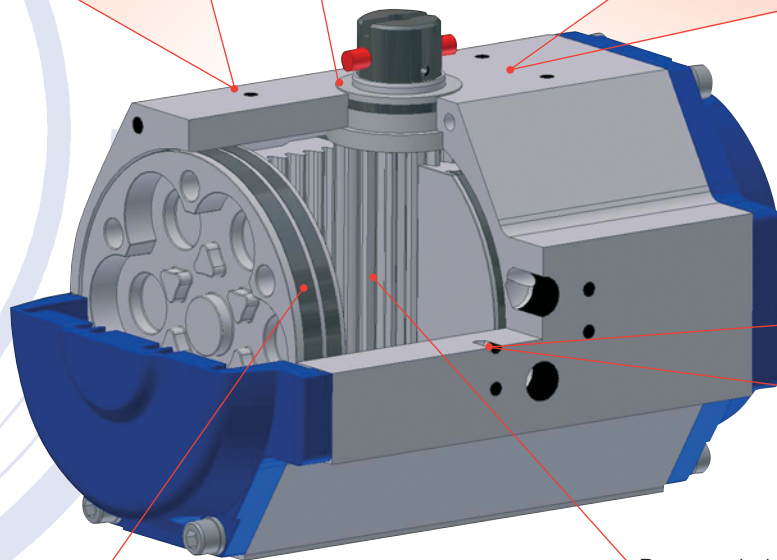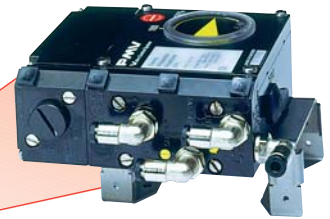

Pressure-balanced, blow-out safe pinion.

Gliding tapes on pistons, arranged with a wide distance in between, minimise tilting and optimise low-wear operation.



## MAIN APPLICATIONS


- Power plants
- Sugar refining
- Petrochemical processing
- Waste incineration
- Food & Beverage production
- Steel manufacturing
- Pulp & Paper
- Chemical manufacturing

## UNIQUE DESIGN FEATURES


- Patented, pressure balanced shaft prevent axial forces acting on the bearings. This results in high reliability, long lifetime and low wear.
- Shaft and the bearing bushings, mounted from inside, are of blow-out safe design, with no need for external circlips or snap rings, providing high operational safety.
- Robust anodised aluminium housings ensure an even expansion under thermal influences: no jamming of the piston and a high level of corrosion protection.
- Optimally positioned, self-lubricating sliding bands on the piston (made of graphite filled Teflon) ensure low friction operation with minimal risk of piston tilt, resulting in low wear.
- Left and right wounded springs avoid torsion force and provide proper actuation function.
- Interfaces comply with NAMUR and ISO-standards.
- Simple retrofitting of accessories, such as solenoid valves, limit switch and positioners.
- Compact design allows extensive direct mounting orientations.

## REVO ACTUATOR OPTIONS

Standard Option.  
Limit Stops for  
012 to 180




Multi-position  
actuators

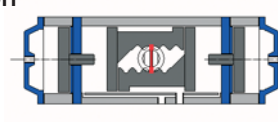



Limit Stop Plates  
for 205 to H15




Hydraulic  
Dampening

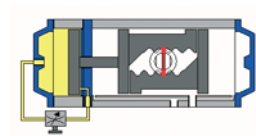


180° Actuator



Emergency  
Gears



High and Low  
Temperature Options

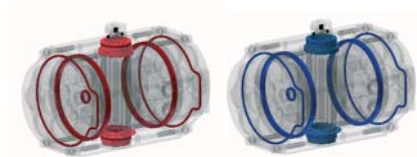

Coatings and  
Special Finishes



# Revo Actuators – Series R

## Torques (Nm)

### Double Acting Actuators

torques are only valid for 0° to 90°

| Model  | Air Supply (bar) |      |      |      |      |       |       |
|--------|------------------|------|------|------|------|-------|-------|
|        | 2                | 3    | 4    | 5    | 6    | 7     | 8     |
| RD 001 | 2.2              | 3.3  | 4.4  | 6.55 | 6.6  | 7.7   |       |
| RD 002 | 5                | 8    | 11   | 14   | 16   | 19    |       |
| RD 006 | 12               | 19   | 25   | 31   | 37   | 43    |       |
| RD 012 | 24               | 37   | 49   | 62   | 74   | 86    | 99    |
| RD 025 | 48               | 72   | 96   | 120  | 144  | 168   | 192   |
| RD 050 | 88               | 133  | 177  | 222  | 266  | 310   | 355   |
| RD 090 | 168              | 253  | 337  | 422  | 506  | 590   | 675   |
| RD 130 | 256              | 385  | 513  | 642  | 770  | 898   | 1027  |
| RD 180 | 338              | 506  | 675  | 843  | 1012 | 1181  | 1349  |
| RD 205 | 506              | 758  | 1011 | 1264 | 1517 | 1769  | 2022  |
| RD 380 | 758              | 1138 | 1517 | 1897 | 2276 | 2655  | 3035  |
| RD 630 | 1264             | 1896 | 2528 | 3160 | 3792 | 4424  | 5056  |
| RD 960 | 1920             | 2879 | 3839 | 4798 | 5758 | 6718  | 7677  |
| RD H15 | 2938             | 4407 | 5876 | 7345 | 8814 | 10283 | 11752 |

### Single Acting Actuators

| Model    | Air Supply (bar) |               |         |               |         |               |         |               |         |               |       |               |
|----------|------------------|---------------|---------|---------------|---------|---------------|---------|---------------|---------|---------------|-------|---------------|
|          | 2.5-2.9          |               | 3.0-3.9 |               | 4.0-4.9 |               | 5.0-5.9 |               | 6.0-6.9 |               | 7.0-8 |               |
|          | Nm               | No of Springs | Nm      | No of Springs | Nm      | No of Springs | Nm      | No of Springs | Nm      | No of Springs | Nm    | No of Springs |
| RS/A 002 | 2                | 4             | 2.9     | 6             | 3.8     | 8             | 4.8     | 10            | 5.8     | 12            |       |               |
| RS/A 006 | 4.4              | 4             | 6.9     | 6             | 9.1     | 8             | 11.3    | 10            | 13.5    | 12            |       |               |
| RS/A 012 | 8                | 4             | 12      | 6             | 16      | 8             | 21      | 10            | 25      | 12            | 29    | 14            |
| RS/A 025 | 16               | 4             | 44      | 6             | 32      | 8             | 40      | 10            | 48      | 12            | 56    | 14            |
| RS/A 050 | 29               | 4             | 44      | 6             | 58      | 8             | 73      | 10            | 88      | 12            | 120   | 14            |
| RS/A 090 | 53               | 4             | 80      | 6             | 107     | 8             | 134     | 10            | 160     | 12            | 187   | 14            |
| RS/A 130 | 81               | 4             | 122     | 6             | 162     | 8             | 203     | 10            | 244     | 12            | 284   | 14            |
| RS/A 180 | 107              | 4             | 160     | 6             | 213     | 8             | 267     | 10            | 320     | 12            | 373   | 14            |
| RS/A 205 | 169              | 4             | 253     | 6             | 337     | 8             | 421     | 10            | 506     | 12            | 590   | 14            |
| RS/A 380 | 253              | 4             | 379     | 6             | 506     | 8             | 632     | 10            | 758     | 12            | 885   | 14            |
| RS/A 630 | 421              | 4             | 632     | 6             | 843     | 8             | 1053    | 10            | 1264    | 12            | 1475  | 14            |
| RS/A 960 | 632              | 6             | 948     | 9             | 1264    | 12            | 1580    | 15            | 1896    | 18            |       |               |
| RS/A H15 | 979              | 4             | 1468    | 6             | 1958    | 8             | 2447    | 10            | 2937    | 12            | 3792  | 14            |

Other spring combinations possible.



## Flange Connections – DIN/ISO 5211 and female square DIN 3337 Torques (Nm)

| Connection             | Torque (Nm <sup>1</sup> ) | F03 V09 | F04 V11 | F05 V14 | F07 V17        | F10 V22 | F12 V27 | F14 V36 | F16 V46 | F16 V46 | F25 V55 | F25 V55 | F30 V75 |
|------------------------|---------------------------|---------|---------|---------|----------------|---------|---------|---------|---------|---------|---------|---------|---------|
| Pinion height          |                           | 20      | 20      | 20      | 20             | 30      | 30      | 30      | 30      | 30      | 30      | 30      | 30      |
| Drilling acc. DIN 3845 |                           | 25x50   | 25x50   | 30x80   | 30x80 & 30x130 | 30x130  | 30x130  | 30x130  | 30x130  | 30x150  | 30x150  | 30x175  | 30x175  |
| <b>Model</b>           |                           |         |         |         |                |         |         |         |         |         |         |         |         |
| R 001                  | 32                        |         |         |         |                |         |         |         |         |         |         |         |         |
| R 002                  | 32                        |         |         |         |                |         |         |         |         |         |         |         |         |
| R 002                  | 63                        |         |         |         |                |         |         |         |         |         |         |         |         |
| R 006                  | 32                        |         |         |         |                |         |         |         |         |         |         |         |         |
| R 006                  | 63                        |         |         |         |                |         |         |         |         |         |         |         |         |
| R 006                  | 125                       |         |         |         |                |         |         |         |         |         |         |         |         |
| R 012                  | 125                       |         |         |         |                |         |         |         |         |         |         |         |         |
| R 025                  | 125                       |         |         |         |                |         |         |         |         |         |         |         |         |
| R 050                  | 250                       |         |         |         |                |         |         |         |         |         |         |         |         |
| R 090                  | 250                       |         |         |         |                |         |         |         |         |         |         |         |         |
| R 090                  | 500                       |         |         |         |                |         |         |         |         |         |         |         |         |
| R 130                  | 500                       |         |         |         |                |         |         |         |         |         |         |         |         |
| R 130                  | 1000                      |         |         |         |                |         |         |         |         |         |         |         |         |
| R 180                  | 1000                      |         |         |         |                |         |         |         |         |         |         |         |         |
| R 205                  | 2000                      |         |         |         |                |         |         |         |         |         |         |         |         |
| R 380                  | 2000                      |         |         |         |                |         |         |         |         |         |         |         |         |
| R 380*                 | 4000                      |         |         |         |                |         |         |         |         |         |         |         |         |
| R 630                  | 4000                      |         |         |         |                |         |         |         |         |         |         |         |         |
| R 960                  | 4000                      |         |         |         |                |         |         |         |         |         |         |         |         |
| R 960                  | 8000                      |         |         |         |                |         |         |         |         |         |         |         |         |
| R H15                  | 8000                      |         |         |         |                |         |         |         |         |         |         |         |         |
| R H15                  | 16000                     |         |         |         |                |         |         |         |         |         |         |         |         |

<sup>1</sup>maximum torques for the connection DIN/ISO 5211 \*standard

## Weight & Air Usage

| Model | Weight |        | Air Consumption |
|-------|--------|--------|-----------------|
|       | DA kg  | SR kg  | NL/ travel*     |
| R 001 | 0.35   | 0.35   | 0.06            |
| R 002 | 0.50   | 0.50   | 0.12            |
| R 006 | 0.95   | 1.00   | 0.28            |
| R 012 | 2.15   | 2.30   | 0.53            |
| R 025 | 3.50   | 3.80   | 1.02            |
| R 050 | 5.85   | 6.65   | 1.90            |
| R 090 | 10.40  | 12.00  | 3.60            |
| R 130 | 19.00  | 21.00  | 5.49            |
| R 180 | 22.50  | 25.30  | 7.21            |
| R 205 | 30.00  | 33.00  | 9.00            |
| R 380 | 37.00  | 41.50  | 13.00           |
| R 630 | 45.00  | 54.00  | 22.00           |
| R 960 | 77.30  | 89.00  | 32.50           |
| R H15 | 92.00  | 106.00 | 52.00           |

\* norm liter at 1 bar per travel 0 - 90°

# Revo Actuators – Series R

## Part Number Configurator

|   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |
|---|---|---|---|---|---|---|---|---|----|----|----|----|----|----|
| 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 13 | 14 | 15 |
| R | D | 5 | 0 | 1 | 2 | 0 | 0 | 5 | 0  | M  | B  | 0  | 0  | 0  |



### 1 Series

R Revo Actuator

### 2 Function

D double acting  
 S spring to close  
 A spring to open  
 E 180° actuator, DA  
 F 180° actuator, SR  
 G 180° actuator, SR  
 H hydr.damper, DA  
 K hydr.damper, SR  
 L hydr.damper, SR  
 M multi position 0-45°-90°  
 N multi position 0-90°-180°

### 3 Version

5 90° actuator (012-H15)  
 6 90° actuator (012-180)  
 (incl. limit stops open/closed and 4° overtravel)  
 7 90° actuator (001-006)

### 4, 5 + 6 Size

001  
 002  
 006  
 012  
 025  
 :  
 H15

refer to standard data sheets

**INFO**

### 7, 8 + 9 Connection

003 F03, square 9mm  
 004 F04, square 11mm  
 005 F05, square 14mm  
 007 F07, square 17mm  
 010 F10, square 22mm  
 012 F12, square 27mm  
 014 F14, square 36mm  
 016 F16, square 46mm  
 025 F25, square 55mm  
 030 F30, square 75mm

### 10 Number of springs

0 double acting  
 1 single acting, 1 spring  
 2 single acting, 2 springs  
 3 single acting, 3 springs  
 :  
 9 single acting, 9 springs  
 A single acting, 10 springs  
 B single acting, 11 springs  
 C single acting, 12 springs  
 D single acting, 13 springs  
 E single acting, 14 springs  
 :  
 K spring return, 18 springs  
 (only for size 960)

### 11 + 12 Execution

00 standard -20° to 80°C  
 MB High Temperature  
 -20° to 140°C  
 MC Low Temperature  
 -40° to 80°C

### 13 + 14 Coating\*

00 standard  
 (anodized end cap  
 RAL 5002)

\*except 001 – 006, RAL 5009



### 15 Misc.

0 Standard





### INFO – Rule of thumb

size = torques at 1 bar,  
 eg. 012 at 6 bar:  
 12Nm x 6 bar = 72Nm


## Dimensions

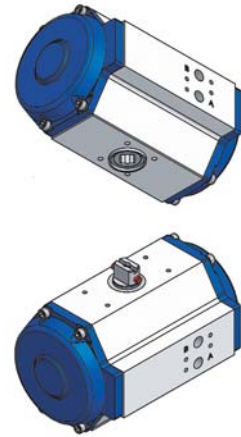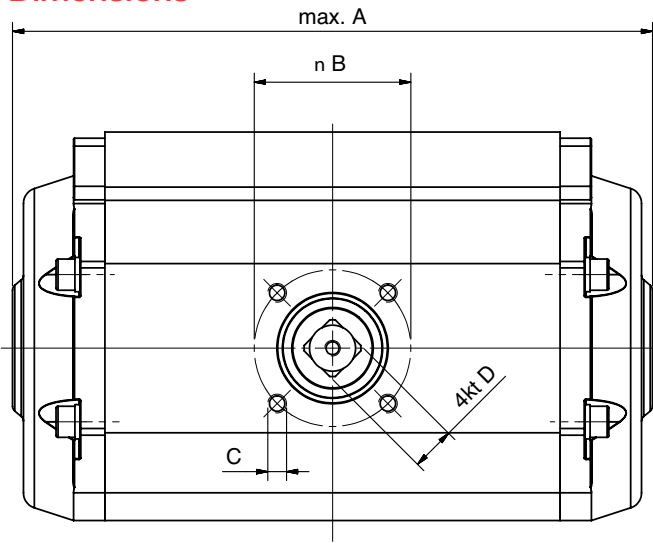

Diameter for size 012-H15: n E  
 DOUBLE-"D" for size 001-006: 14

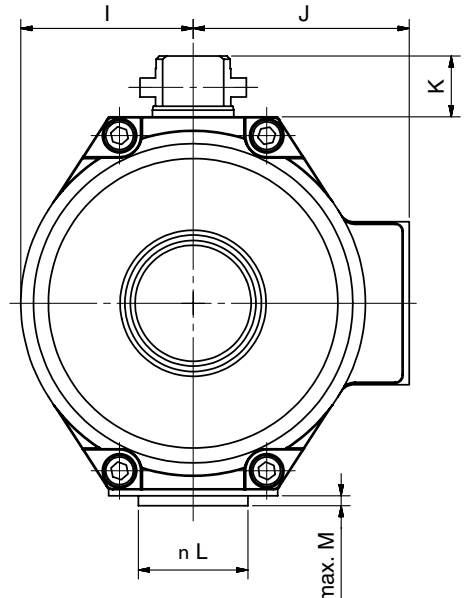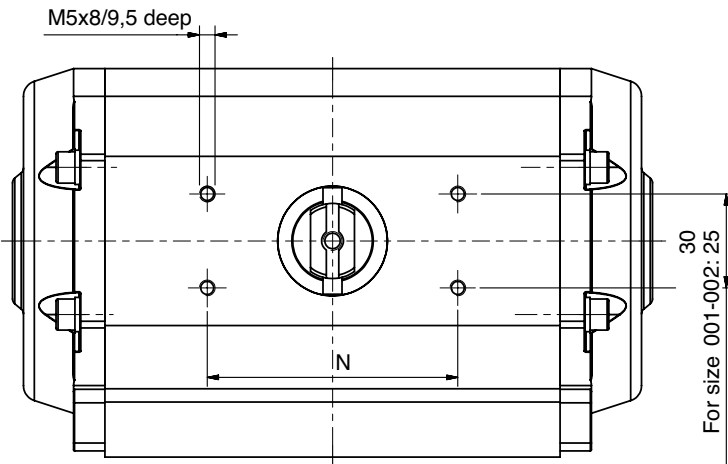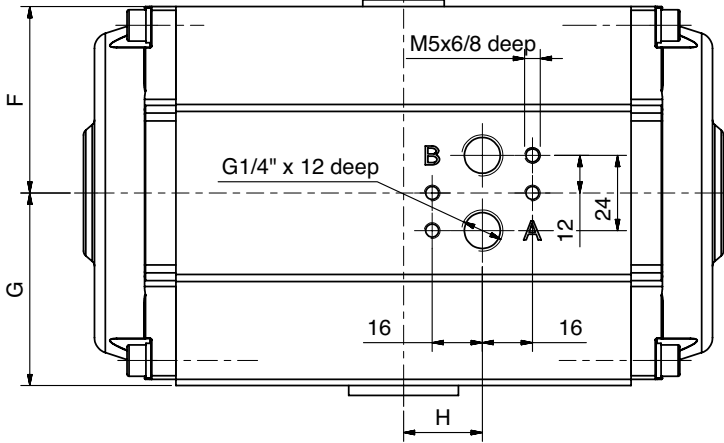

Size 001-180

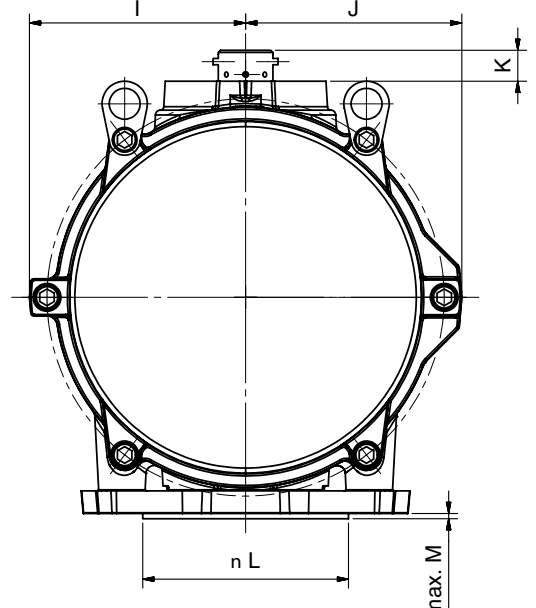

Size 205-H15

| Model |
|-------|
| R 001 |
| R 002 |
| R 002 |
| R 006 |
| R 006 |
| R 006 |
| R 012 |
| R 025 |
| R 050 |
| R 090 |
| R 090 |
| R 130 |
| R 130 |
| R 180 |
| R 205 |
| R 205 |
| R 380 |
| R 380 |
| R 380 |
| R 380 |
| R 380 |
| R 630 |
| R 630 |
| R 960 |
| R 960 |
| R 960 |
| R 960 |
| R H15 |
| R H15 |
| R H15 |
| R H15 |

| Connection<br>Function |       | A   | B    | C                | D          | E   | F        | G         | H       | I         | J         | K    | L    | M | N       |
|------------------------|-------|-----|------|------------------|------------|-----|----------|-----------|---------|-----------|-----------|------|------|---|---------|
| F03                    | DA/SR | 120 | Ø36  | (4x) M5x8/10     | 9H11x10    | -   | 22±1     | 24±1      | -       | 20,5±0,5  | 30,5±0,5  | 20±1 | -    | - | 50      |
| F03                    | DA/SR | 170 | Ø36  | (4x) M5x8/9      | 9H11x12    | -   | 27,5±2   | 29±1      | -       | 25,5±0,5  | 33±0,5    | 20±1 | -    | - | 50      |
| F04                    | DA/SR | 170 | Ø42  | (4x) M8x12,5/14  | 11H11x12   | -   | 27,5±2   | 29±1      | -       | 25,5±0,5  | 33±0,5    | 20±1 | -    | - | 50      |
| F03                    | DA/SR | 205 | Ø36  | (4x) M5x8/9      | 9H11x17    | -   | 37,5±2   | 39±1      | -       | 34,7±0,5  | 41,5±0,5  | 20±1 | -    | - | 80      |
| F04                    | DA/SR | 205 | Ø42  | (4x) M5x7,5/11   | 11H11x17   | -   | 37,5±2   | 39±1      | -       | 34,7±0,5  | 41,5±0,5  | 20±1 | -    | - | 80      |
| F05                    | DA/SR | 205 | Ø50  | (4x) M6x10/11    | 14H11x17   | -   | 37,5±2   | 39±1      | -       | 34,7±0,5  | 41,5±0,5  | 20±1 | -    | - | 80      |
| F05                    | DA/SR | 215 | Ø50  | (4x) M6x8,8/9,8  | 14H11x17+1 | Ø24 | 44,5±1,5 | 46,5±1    | 25,05±1 | 41±1      | 55,5±1    | 20±1 | Ø35  | 3 | 80      |
| F05                    | DA/SR | 220 | Ø50  | (4x) M6x8,8/9,8  | 14H11x17+1 | Ø24 | 59,5±1,5 | 61,±1     | 25,15±1 | 55±0,5    | 69±1      | 20±1 | Ø35  | 3 | 80      |
| F07                    | DA/SR | 280 | Ø70  | (4x) M8x12,5/14  | 17H11x21+1 | Ø24 | 71,5±1,5 | 74,5±1,5  | 32,25±1 | 67±1      | 81±1      | 20±1 | Ø55  | 3 | 80(130) |
| F07                    | DA/SR | 365 | Ø70  | (4x) M8x13/14,5  | 17H11x21+1 | Ø24 | 81,5±2,5 | 84,5±1,5  | 46,85±1 | 78±1      | 96±1,5    | 20±1 | Ø55  | 3 | 80(130) |
| F10                    | DA/SR | 365 | Ø102 | (4x) M10x16/18,5 | 22H11x25+1 | Ø24 | 81,5±2,5 | 84,5±1,5  | 46,85±1 | 78±1      | 96±1,5    | 30±1 | Ø70  | 4 | 130     |
| F10                    | DA/SR | 430 | Ø102 | (4x) M10x16/18,5 | 22H11x25+1 | Ø24 | 94±3     | 98±2      | 54,5±1  | 90±1,5    | 102±1,5   | 30±1 | Ø70  | 4 | 130     |
| F12                    | DA/SR | 430 | Ø125 | (4x) M12x18/22   | 27H11x30+1 | Ø24 | 94±3     | 98±2      | 54,5±1  | 90±1,5    | 102±1,5   | 30±1 | Ø85  | 4 | 130     |
| F12                    | DA/SR | 440 | Ø125 | (4x) M12x18/22   | 27H11x30+1 | Ø24 | 106,5±3  | 111,5±1,5 | 54,5±1  | 102±1,5   | 116±1,5   | 30±1 | Ø85  | 4 | 130     |
| F14                    | SR    | 500 | Ø140 | (4x) M16x26/27,5 | 36H11x40+1 | Ø53 | 137±3    | 137±3     | 67,5±1  | 136±2,5   | 140±3     | 30±1 | Ø100 | 4 | 130     |
| F14                    | DA    | 390 | Ø140 | (4x) M16x26/27,5 | 36H11x40+1 | Ø53 | 137±3    | 137±3     | 67,1±1  | 136±2,5   | 140±3     | 30±1 | Ø100 | 4 | 130     |
| F14                    | SR    | 610 | Ø140 | (4x) M16x26/27,5 | 36H11x40+1 | Ø53 | 137±3    | 147±3     | 96,5±1  | 136±2,5   | 140±3     | 30±1 | Ø100 | 4 | 130     |
| F14                    | DA    | 500 | Ø140 | (4x) M16x26/27,5 | 36H11x40+1 | Ø53 | 137±3    | 147±3     | 96,5±1  | 136±2,5   | 140±3     | 30±1 | Ø100 | 4 | 130     |
| F16                    | SR    | 610 | Ø165 | (4x) M20x30/32   | 46H11x50+1 | Ø53 | 137±3    | 147±3     | 96,5±1  | 136±2,5   | 140±3     | 30±1 | Ø130 | 5 | 130     |
| F16                    | DA    | 500 | Ø165 | (4x) M20x30/32   | 46H11x50+1 | Ø53 | 137±3    | 147±3     | 96,5±1  | 136±2,5   | 140±3     | 30±1 | Ø130 | 5 | 130     |
| F16                    | SR    | 755 | Ø165 | (4x) M20x22/27   | 46H11x50+1 | Ø53 | 172±3,5  | 172±3,5   | 99±1    | 175±3,5   | 177±3,5   | 30±1 | Ø130 | 5 | 130     |
| F16                    | DA    | 520 | Ø165 | (4x) M20x22/27   | 46H11x50+1 | Ø53 | 172±3,5  | 172±3,5   | 99±1    | 175±3,5   | 177±3,5   | 30±1 | Ø130 | 5 | 130     |
| F16                    | SR    | 760 | Ø165 | (4x) M20x25      | 46H11x50+1 | Ø53 | 210±4    | 210±4     | 96,41±1 | 210±4     | 210±4     | 30±1 | Ø130 | 5 | 150     |
| F16                    | DA    | 540 | Ø165 | (4x) M20x25      | 46H11x50+1 | Ø53 | 210±4    | 210±4     | 96,41±1 | 210±4     | 210±4     | 30±1 | Ø130 | 5 | 150     |
| F25                    | SR    | 760 | Ø254 | (8x) M16x25      | 55H11x59+1 | Ø53 | 210±4    | 210±4     | 96,41±1 | 210±4     | 210±4     | 30±1 | Ø200 | 5 | 150     |
| F25                    | DA    | 540 | Ø254 | (8x) M16x25      | 55H11x59+1 | Ø53 | 210±4    | 210±4     | 96,41±1 | 210±4     | 210±4     | 30±1 | Ø200 | 5 | 150     |
| F25                    | SR    | 920 | Ø254 | (8x) M16x25      | 55H11x59+1 | Ø53 | 225±4,5  | 225±4,5   | 136±1   | 223,5±4,5 | 223,5±4,5 | 30±1 | Ø230 | 5 | 175     |
| F25                    | DA    | 700 | Ø254 | (8x) M16x25      | 55H11x59+1 | Ø53 | 225±4,5  | 225±4,5   | 136±1   | 223,5±4,5 | 223,5±4,5 | 30±1 | Ø230 | 5 | 175     |
| F30                    | SR    | 920 | Ø298 | (8x) M20x25      | 75H11x79+1 | Ø53 | 225±4,5  | 225±4,5   | 136±1   | 223,5±4,5 | 223,5±4,5 | 30±1 | Ø230 | 5 | 175     |
| F30                    | DA    | 700 | Ø298 | (8x) M20x25      | 75H11x79+1 | Ø53 | 225±4,5  | 225±4,5   | 136±1   | 223,5±4,5 | 223,5±4,5 | 30±1 | Ø230 | 5 | 175     |





INTEGRITY TESTING UNIT

INTEGRITY TESTING UNIT

HOLD 1

0.0000

0.0000

0.0000

0.0000

0.0000

0.0000

0.0000

0.0000

0.0000

0.0000

0.0000

0.0000

0.0000

0.0000

0.0000

0.0000

0.0000

0.0000

0.0000

0.0000

0.0000



Crane Process Flow Technologies GmbH  
Revo Antriebs- und Automatisierungstechnik  
Postfach 11 12 40, D-40512 Düsseldorf  
Heerdter Lohweg 63-71, D-40549 Düsseldorf  
Telefon +49 211 5956-0  
Telefax +49 211 5956-111  
www.cranechempharma.com

**CRANE**

ChemPharma Flow Solutions

Austria  
Tel.: +43-2236-682-0  
Fax: +43-2236-4353

Italy  
Tel.: +39-039-2704-280  
Fax: +39-039-2704-450

UAE  
Tel.: +971-4-8864949  
Fax: +971-4-8864950

Belgium  
Tel.: +32-10-8184-44  
Fax: +32-10-8184-58

India  
Tel.: +91-20-26050922-26  
Fax: +91-20-26050927

UK  
Tel.: +44-163-348-6666  
Fax: +44-163-348-6777

**brands you trust.**

CRANE ChemPharma Flow Solutions Include: Pipe - Valves - Fittings - Actuators - Pumps

**DEPA**

**ELRO**

**PSI**  
LINED PIPING SYSTEMS

**RESISTOFLEX**

**ResistoPure**



**Saunders**  
the science inside

**XOMOX**

© Copyright 2009 Crane Process Flow Technologies GmbH.  
Crane®, DEPA®, ELRO®, RESISTOFLEX®, REVO®, SAUNDERS®, XOMOX®  
are registered trademarks of Crane Corporation and its subsidiaries.