

IBR-10A Bronze Asbestos Packed Water Level Gauge Screwed (IBR Approved)

Product Description

HSN 90261020

Product : 'SANT' Bronze Asbestos Packed Water Level Gauge
 Type of Pattern : Standard Pattern
 Body Material cum Standard : Bronze IBR 282(a)(iv) Gr.B
 Description : Right Hand Type / Left Hand Type
 Gland Packing : Lubricated Asbestos
 End Details : Screwed male BSP Parallel threads to BS 21.

Testing & Certification

Hydraulic Test Pressure : 300 Psig.Hyd.
 Working Pressure : Max.BOP 150 Psig.(10.54Kg/cm²)
 Maximum Working Temperature: 225°C (435°F)

Test Certificate in Form III-C as per IBR is furnished with every supply.

Application

Water	Steam
-------	-------




Materials of Construction

Components	Materials	Specifications
Body, Plug, Cover Nuts, Drain Cock & Back Nuts	Bronze	IBR 282(a)(iv) Gr.B
Fastening Nut	Forged Brass	IS:6912 FLB
Packing	Lubricated Asbestos	—

Dimensions (in mm)

Nominal Size	Nominal Size (Inches)	A
10	3/8	102
15	1/2	102
16	5/8	125
20	3/4	125

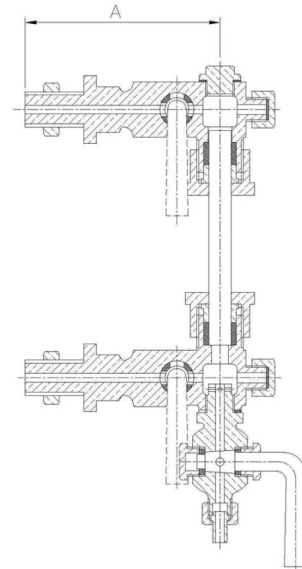

Notes

1. Product images are for illustration purposes only. Actual product may vary.
2. Actual dimensions may change over time, due to continual design improvements. Please confirm before placing order.