

## IS-6 Bronze Gate Valve Non-Rising Stem, Flanged, IS : 778 Class-2 (ISI Marked)

### Product Description

HSN 84818030

Product : 'SANT' Bronze Gate Valve  
 Product Standard : IS-778  
 Pressure/Class/Rating : Class-2  
 Body Material cum Standard : GM ( IS:318 Gr.LTB2 )  
 Description : Screwed in Bonnet, Inside Screw, Non-Rising Stem  
 Type of Seat : Integral seat  
 Type of Wedge : Solid wedge  
 Trim : Cu-Alloy  
 Gland Packing : PTFE  
 End Details : Flanges as per IS:778 Class-2 F.F. undrilled



### Testing & Certification

Body Test Pressure : 2.4 MPa Hyd.  
 Seat & Back Seat Test Pressure : 1.6 MPa Hyd.  
 Max Working Temperature: 45°C

Our Works' Test Certificate is furnished with every supply.

### Application


Water	Oil
-------	-----

### Materials of Construction

Components	Materials	Specifications
Body, Bonnet, Wedge, Stuffing Box, Gland & Gland Nut	Leaded Tin Bronze	IS:318 Gr.LTB2
Stem	Forged Brass	IS:6912 Gr.FLB
Handwheel	Cast Iron / Steel	IS:210 Gr.FG200
Gland Packing	PTFE	---
Screw & Washer for Handwheel	Mild Steel	---

### Dimensions (in mm)

Nominal Size	Nominal Size (Inches)	F	H (Approx.)	ØW (Approx.)
15	1/2	72±1.5	95	60
20	3/4	76±1.5	125	60
25	1	90±1.5	130	65
32	1.1/4	100±1.5	140	85
40	1.1/2	110±1.5	160	90
50	2	120±1.5	170	90
65	2.1/2	140±1.5	215	140
80	3	150±1.5	255	175
100	4	190±1.5	300	200

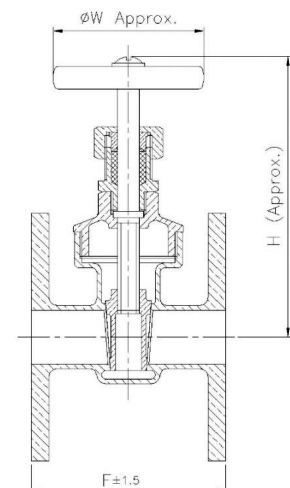

### Notes

- Product images are for illustration purposes only. Actual product may vary.
- Actual dimensions may change over time, due to continual design improvements. Please confirm before placing order.