

## SBM-3 Bronze Gate Valve Standard, Flanged

### Product Description

HSN 84818030

Product : 'SBM' Bronze Gate Valve  
 Type of Pattern : Standard Pattern  
 Body Material cum Standard : GM ( IS:318 Gr.LTB2 )  
 Description : Screwed in Bonnet, Inside Screw, Non-Rising Stem  
 Type of Seat : Integral seat  
 Type of Wedge : Solid wedge  
 Trim : Cu-Alloy  
 Gland Packing : Expanded Pure Flexible Graphite  
 End Details : Flanges as per BS 10 Table D F.F. undrilled



### Testing & Certification

Body Test Pressure : 30.60kg/cm<sup>2</sup>g Hyd. (435 lbs/inch<sup>2</sup>) Hyd.  
 Seat Test Pressure : 20.40kg/cm<sup>2</sup>g Hyd. (290 lbs/inch<sup>2</sup>) Hyd.

Our Works' Test Certificate is furnished with every supply.

### Application


Water	Oil
-------	-----

### Materials of Construction

Components	Materials	Specifications
Body, Bonnet, Wedge, Gland & Gland Nut	Leaded Tin Bronze	IS:318 Gr.LTB2
Stem	Forged Brass	IS:6912 FLB
Gland Packing	Expanded Pure Flexible Graphite	—
Handwheel	Cast Iron / Steel	IS:210 Gr.FG200
Screw & Washer for Handwheel	Mild Steel	—

### Dimensions (in mm)

Nominal Size	Nominal Size (Inches)	F	H	W
15	1/2	68	100	60
20	3/4	78	115	60
25	1	87	135	65
32	1.1/4	94	145	80
40	1.1/2	112	160	80
50	2	118	190	90
65	2.1/2	140	225	145
80	3	145	265	175
100	4	178	320	200
125	5	215	325	225
150	6	260	440	270

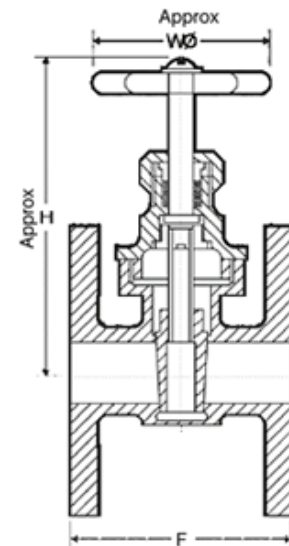

### Notes

1. Product images are for illustration purposes only. Actual product may vary.
2. Actual dimensions may change over time, due to continual design improvements. Please confirm before placing order.