

IBR-12A Bronze Y-Type Strainer Screwed (IBR Approved)

Product Description

HSN 84818030

Product : 'SANT' Bronze Y-Type Strainer
 Type of Pattern : Y Type
 Body Material cum Standard : Bronze IBR 282(a)(iv) Gr.B
 Description : Y-Type Screwed in cover, SS 304 Screen having 0.5mm Dia perforations
 End Details : Screwed female BSP Taper threads to BS 21.

Testing & Certification

Hydraulic Test Pressure : 500 Psig.Hyd.
 Working Pressure : Max.BOP 250 Psig.(17.58Kg/cm²)
 Maximum Working Temperature : 435°F (225°C)

Test Certificate in Form III-C as per IBR is furnished with every supply.

Application

Water	Oil	Gas	Steam
-------	-----	-----	-------




Materials of Construction

Components	Materials	Specifications
Body, Bonnet	Bronze	IBR 282(a)(iv) Gr.B
Gasket	Compressed Asbestos Fiber	IS:2712 Gr.C
Strainer	Stainless Steel	AISI304

Dimensions (in mm)

Nominal Size	Nominal Size (Inches)	F
15	1/2	76
20	3/4	98
25	1	133
32	1.1/4	152
40	1.1/2	178
50	2	222

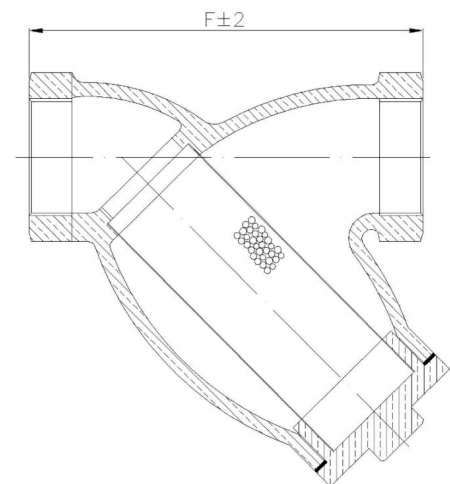

Notes

1. Product images are for illustration purposes only. Actual product may vary.
2. Actual dimensions may change over time, due to continual design improvements. Please confirm before placing order.